

SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

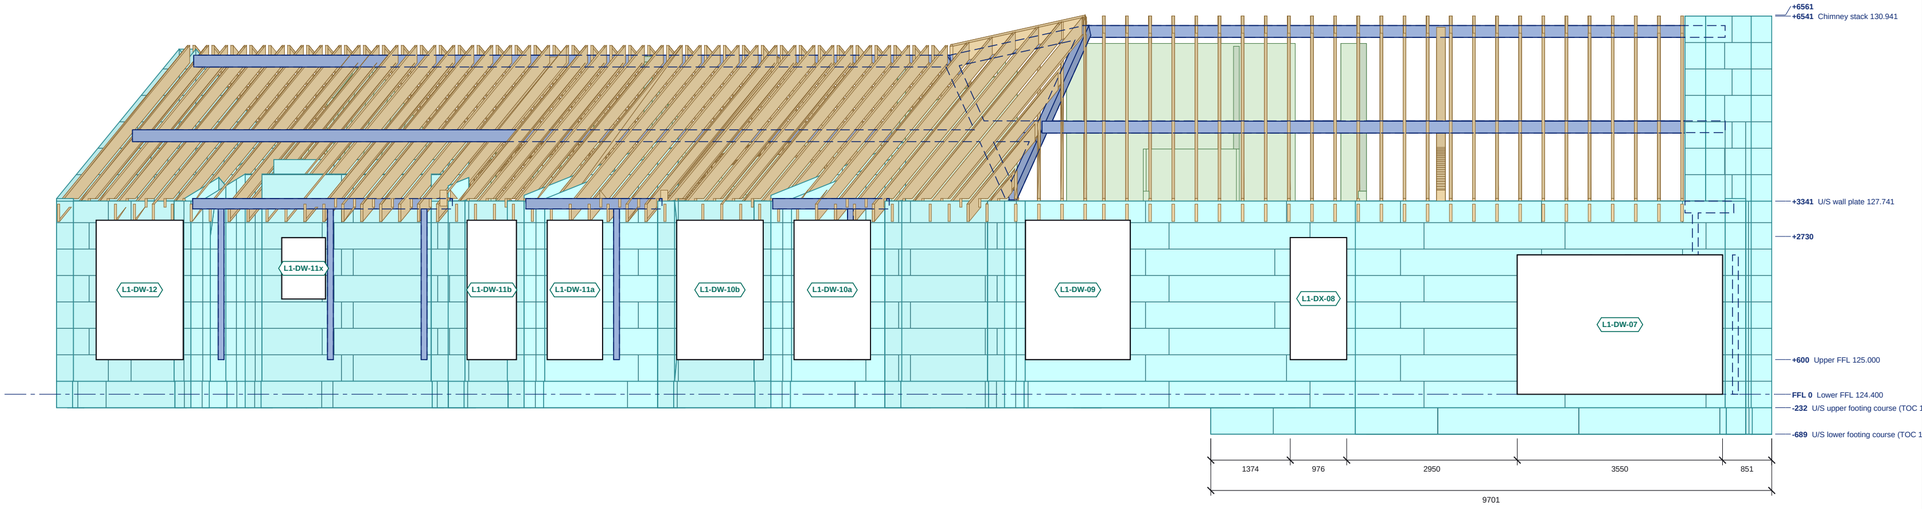

NORTH ELEVATION

Scale 1:75 @ A2 | Levels above GF FFL; sills and heads in the schedule

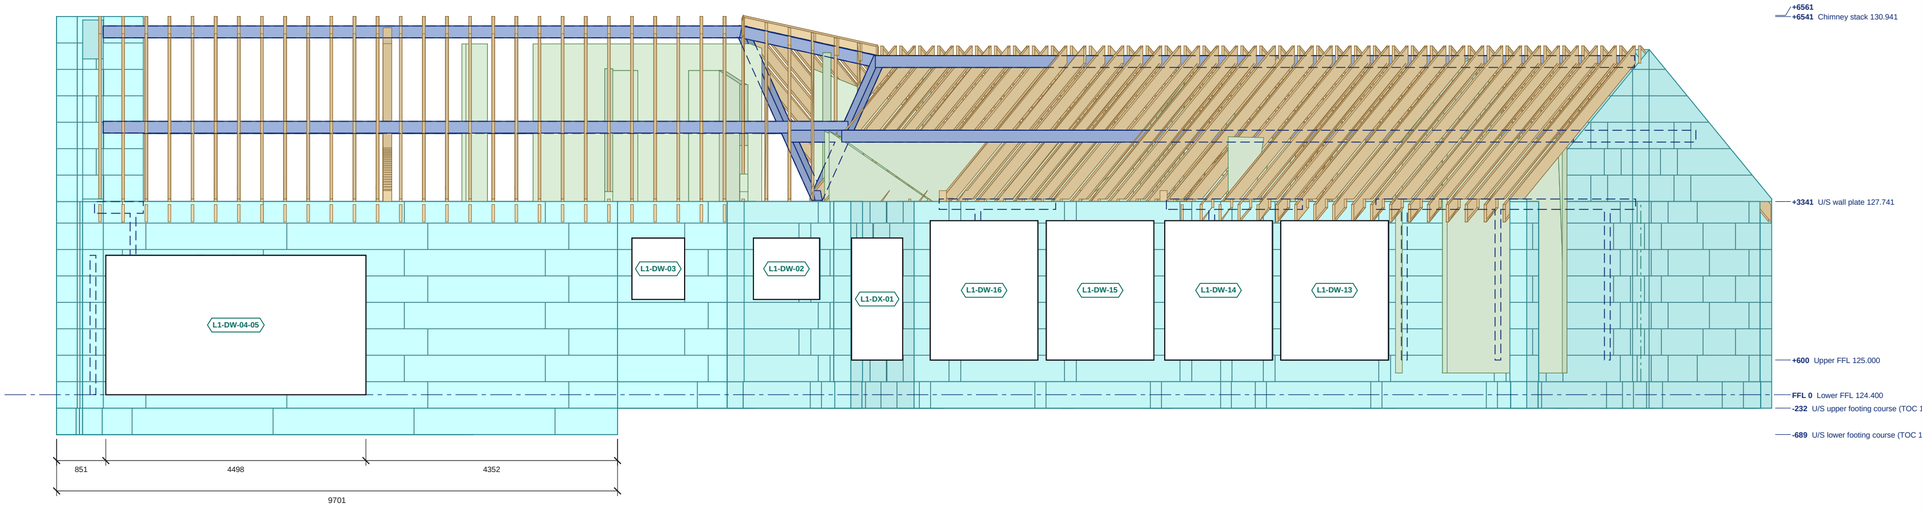

SOUTH ELEVATION

Scale 1:75 @ A2 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4m

ICF external EPS face
Block course joint
Stack joint
Steel
Curved trusses / timbers
GF slab + foundation build-up, ACO

ELEVATION SCHEDULES

NORTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-DW-07	3550	2410	0	+2410	-
L1-DX-08	976	2110	+600	+2710	-
L1-DW-09	1810	2410	+600	+3010	-
L1-DW-10a	1322	2410	+600	+3010	-
L1-DW-10b	1589	2410	+600	+3010	-
L1-DW-11a	956	2410	+600	+3010	-
L1-DW-11b	804	2410	+600	+3010	-
L1-DW-11x	685	1060	+1648	+2708	-
L1-DW-12	1600	2410	+600	+3010	-

Structural openings in the ICF; sill and head above GF FFL.

SOUTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-DW-13	2035	2410	+600	+3010	-
L1-DW-14	2035	2410	+600	+3010	-
L1-DW-15	2035	2410	+600	+3010	-
L1-DW-02	1160	1060	+1648	+2708	-
L1-DX-01	1060	2110	+600	+2710	-
L1-DW-16	2035	2410	+600	+3010	-
L1-DW-03	910	1060	+1648	+2708	-
L1-DW-04-05	4498	2410	0	+2410	-

Structural openings in the ICF; sill and head above GF FFL.

NORTH ELEVATION: LEVELS

Level	FFL
U/S lower footing course (TOC 123.711)	-689
U/S upper footing course (TOC 124.168)	-232
Lower FFL 124.400	0
Upper FFL 125.000	+600
top of ICF	+2730
U/S wall plate 127.741	+3341
Chimney stack 130.941	+6541
top of roof build-up	+6561

SOUTH ELEVATION: LEVELS

Level	FFL
U/S lower footing course (TOC 123.711)	-689
U/S upper footing course (TOC 124.168)	-232
Lower FFL 124.400	0
Upper FFL 125.000	+600
U/S wall plate 127.741	+3341
Chimney stack 130.941	+6541
top of roof build-up	+6561

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Steel, trusses, masonry and ground floor build-up shown as modelled.
4. See ES26-063-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Nudura proposal Rev A

Nudura™ BuildEase

CLIENT: Ethos Property Development	PROJECT: Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
NORTH AND SOUTH ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:75	A2	02.11.26
DRAWN: TS	CHECKED	APPROVED

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-EL-01	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.