
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

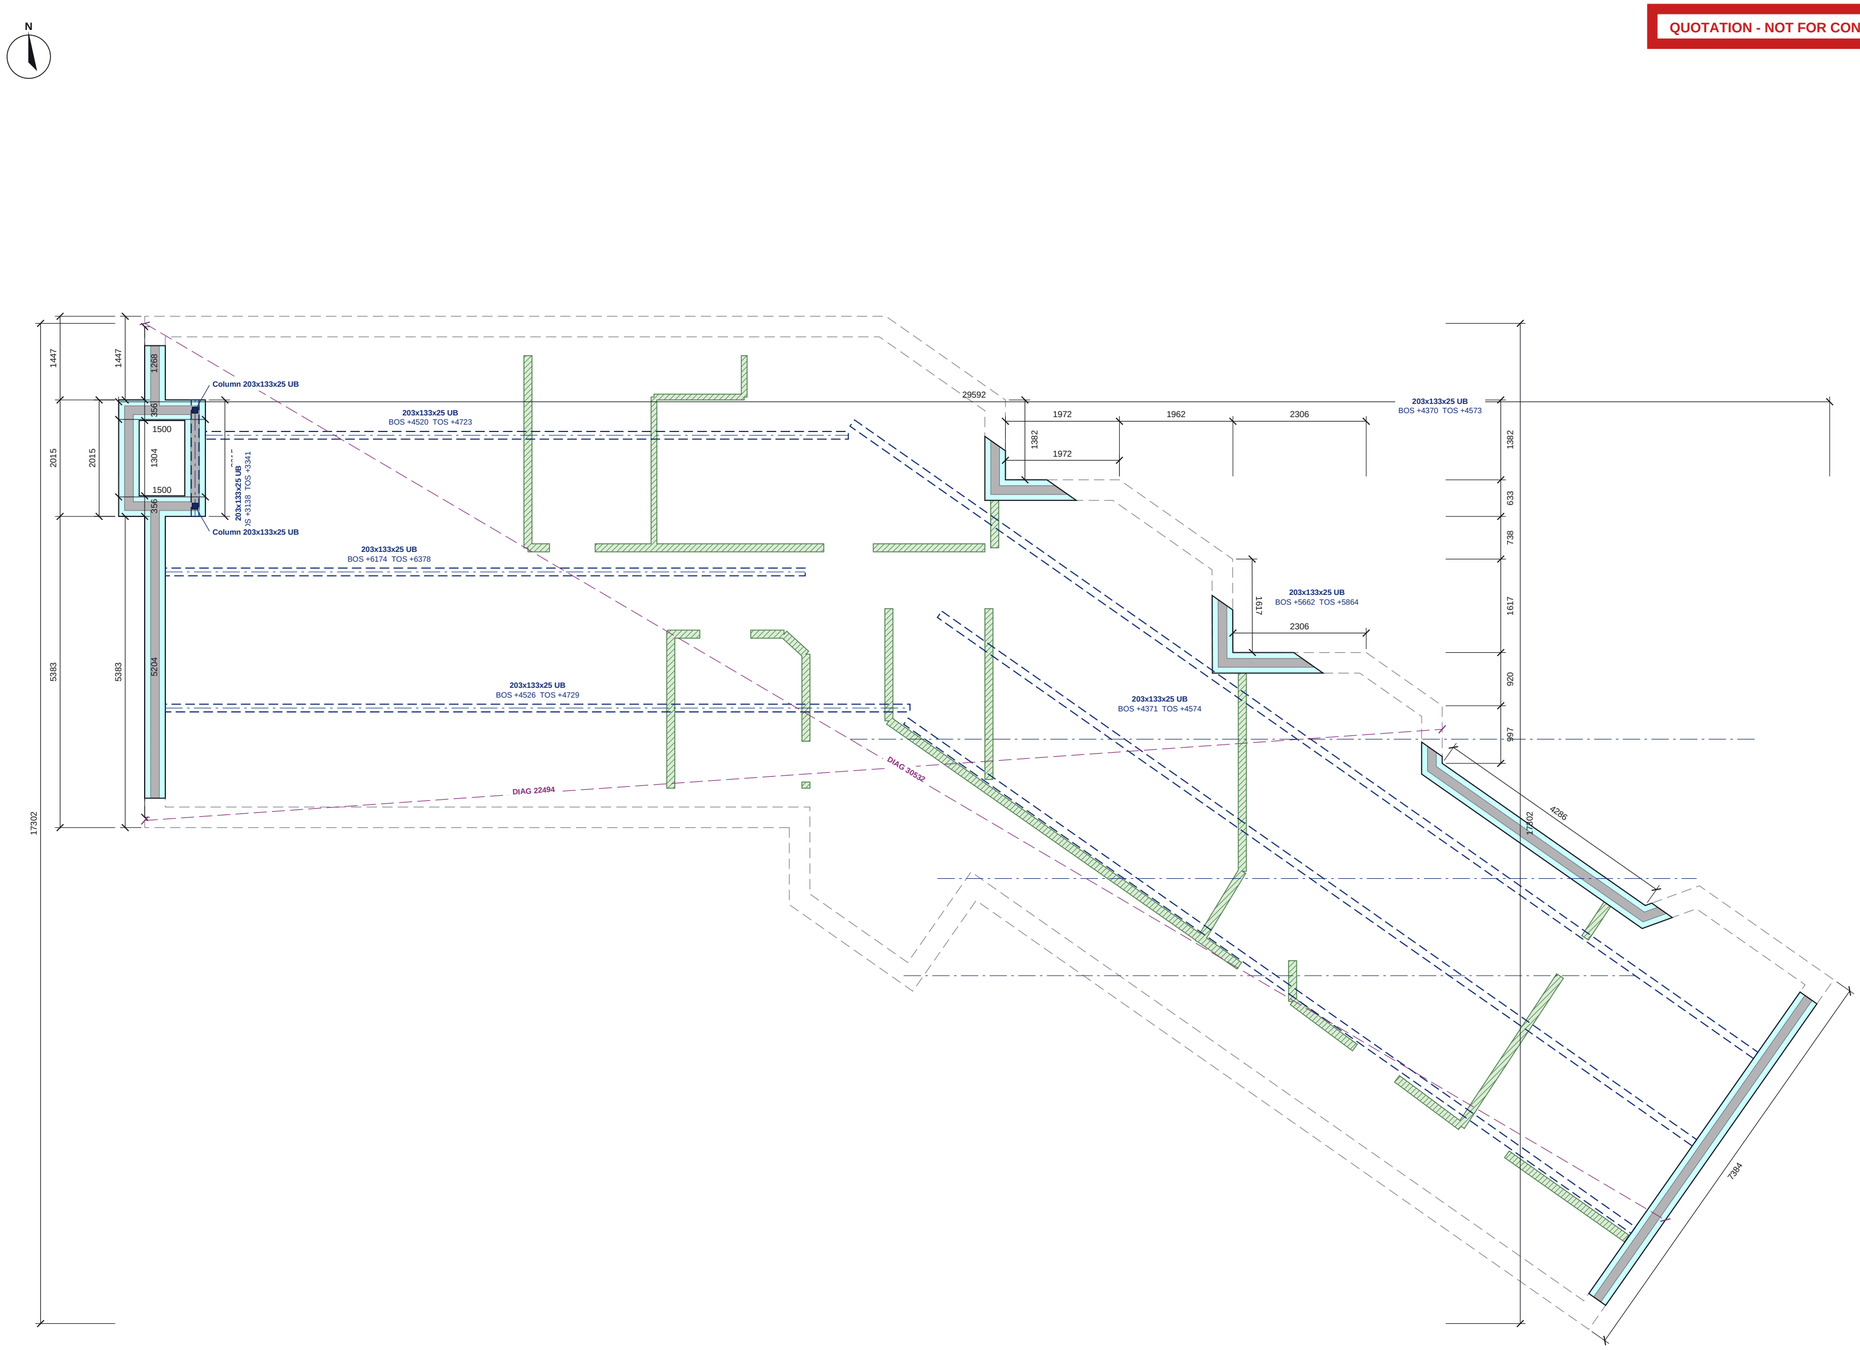

- EPS insulation (Nudura form)
- Concrete core
- End cap at opening
- Load-bearing masonry wall (context)
- ICF walls of the level below (dashed)
- Steel over (dashed), marked
- Steel column cut
- Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
- Setting-out check diagonal (external ICF corners)
- Section line (see SE sheet)

L2 GABLES - XR35 ICF PLAN

Scale 1:75 @ A2 | Plan cut at +3741

0 1 2 3 4m

L2 GABLES - XR35 ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
-	203x133x25 UB S355	+6174	+6378
-	203x133x25 UB S355	+5662	+5864
-	203x133x25 UB S355	+4520	+4723
-	203x133x25 UB S355	+4526	+4729
-	203x133x25 UB S355	+4370	+4573
-	203x133x25 UB S355	+4371	+4574
-	203x133x25 UB S355	+3138	+3341
-	203x133x25 UB S355	+0	+3138
-	203x133x25 UB S355	+0	+3138

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design yet. ICF per the quotation model: one 8in Standard footing course in each floor zone (lower 124.40 kitchen / dining / snug, upper 125.00 elsewhere), block and beam bearing on it with a 150 mm inside-face cut, 6in XR35 above to the wall plate (127.741), gables raked to the 35 degree roof, the chimney stack to 130.941 and the walls set back from the eaves raised to the vaulted roof. Stack support steel, ridges, purlins, oak trusses and posts for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Nudura proposal Rev A

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE

L2 GABLES - XR35 ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:75	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-GA-04	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.