
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

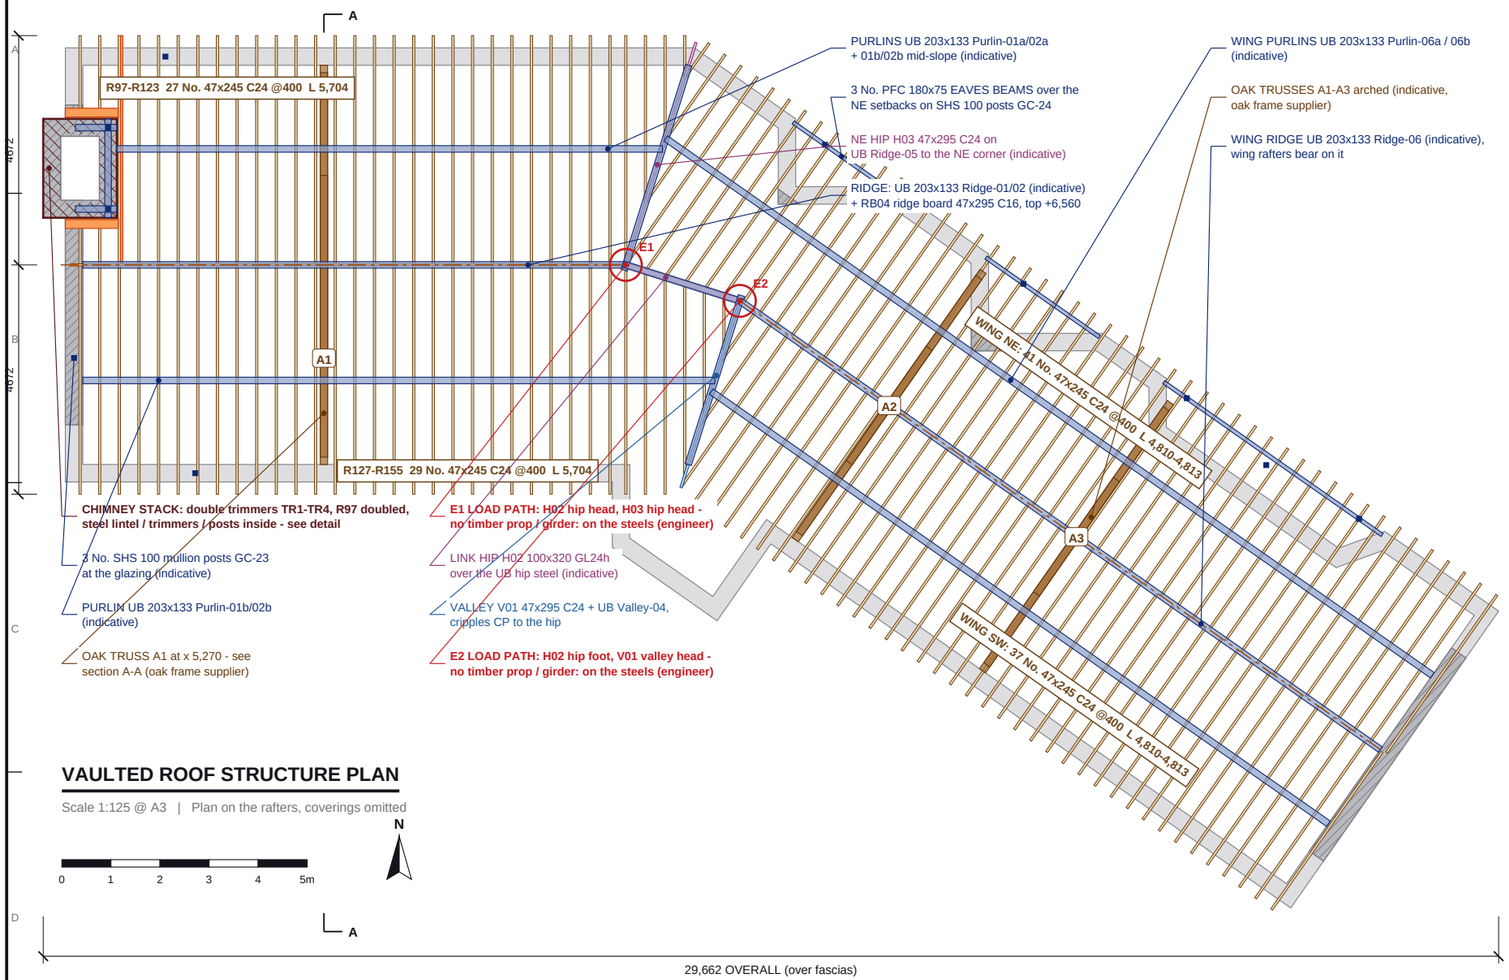

VAULTED ROOF STRUCTURE PLAN


Scale 1:125 @ A3 | Plan on the rafters, coverings omitted

0 1 2 3 4 5m

N


A

29,662 OVERALL (over fascias)

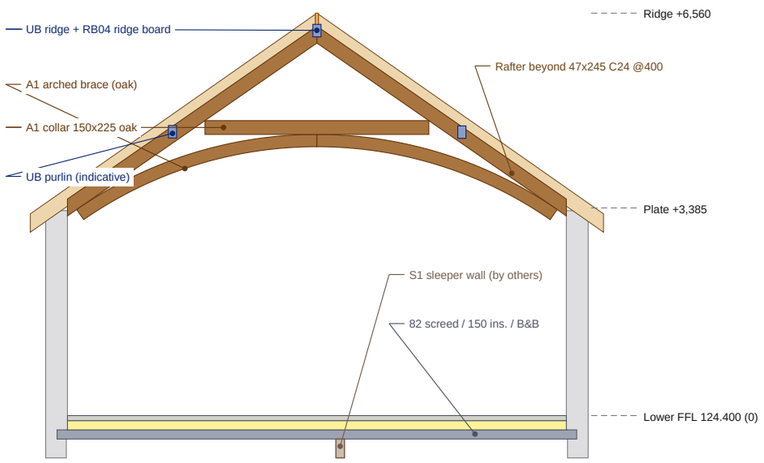

SECTION A-A - OAK TRUSS A1

Scale 1:100 @ A3 | At x 5,270, looking east

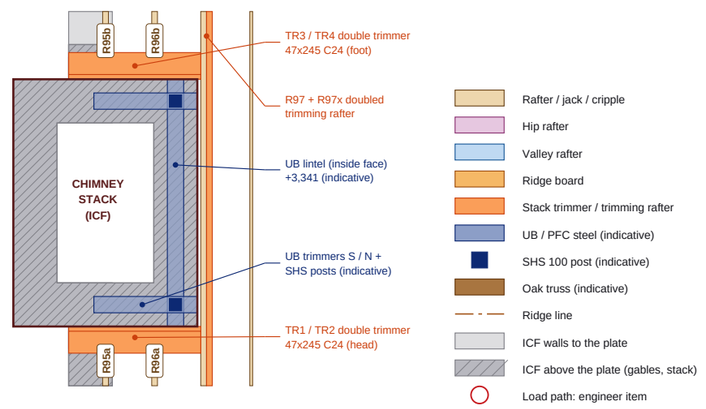

CHIMNEY STACK TRIMMING

Scale 1:50 @ A3 | Plan

Do not scale. All dimensions in mm. Check all dimensions on site.

ROOF STRUCTURE SCHEDULES

ROOF MEMBER SCHEDULE

Mark	Member	Section	Length	Qty
North block				
RB	Ridge board	47x295 C16	11,321	1
R	Common rafter @400	47x245 C24	5,704	56
R95a/96a	Cut common, ridge -> stack trimmer	47x245 C24	1,050	2
R95b/96b	Cut common, stack trimmer -> eaves	47x245 C24	1,978	2
TR	Double trimmer at the stack (2 x 2 ply)	47x245 C24	1,077	4
R97x	Trimming rafter 2nd ply (R97 doubled)	47x245 C24	5,675	1
H02	Hip rafter (link)	100x320 GL24h	2,490	1
H03	Hip rafter (NE corner)	47x295 C24	5,891	1
CR	Crown rafter (hip end)	47x245 C24	5,704	1
JH	Jack rafter, plate -> hip	47x245 C24	1,057-5,550	13
Link + wing				
V01	Valley rafter	47x295 C24	4,968	1
CP	Cripple, valley -> hip	47x245 C24	1,379-4,783	6
JH	Wing rafter NE slope, plate -> ridge steel	47x245 C24	4,810-4,813	41
JH	Wing rafter SW slope, plate -> ridge steel	47x245 C24	4,810-4,813	37
	Total timber members			**167**

Cut lengths from the model (min-max where they vary). R95a/b, R96a/b from the stack trimming set-out. Wing rafters bear on the UB ridge Ridge-06 (no timber wing ridge board).

STEELS - INDICATIVE (ENGINEER TO DESIGN)

Section	Item	Length	Qty
UB 203x133	Ridges Ridge-01/02, -05 (NE), -06 (wing)	5,127-15,938	3
UB 203x133	Link hip + Valley-04	2,490-4,204	2
UB 203x133	Purlins 01a/02a, 01b/02b, 06a, 06b	11,119-19,073	4
PFC 180x75	Eaves beams over the NE setbacks	2,408-5,430	3
SHS 100x100	Eaves posts GC-24 (P8/P11/P14/P15/24A)	2,605	5
SHS 100x100	Glazing mullion posts GC-23	2,410	3
UB 203x133	Stack lintel + trimmers S / N	843-2,015	3
SHS 100x100	Stack posts S / N	3,138	2

Lengths from the model. Post lengths to the underside of the beam.

OAK TRUSSES - INDICATIVE (OAK FRAME SUPPLIER)

Truss	Centre	Span	Apex
A1	x 5,270, y 4,422	8,134	+6,348
A2	x 16,790, y 1,557	6,673	+5,836
A3	x 20,607, y -1,115	6,673	+5,836

Arched oak trusses 150x225: principal rafters, collar, arched braces.

NOTES

1. VAULTED cut roof as modelled for the quotation (BCDS FormFramer), 35 deg: north block (W gable + chimney stack, hip to the NE), link (valley V01 + hip H02), wing to the SE gable. Rafters 47x245 C24 @400 on the 44 wall plate on the ICF (top +3,385), 250 overhang. Roof build-up / coverings by others.
2. STEELS and OAK TRUSSES A1-A3 are INDICATIVE: steels, seatings over the steels, bearings and connections by the structural engineer; arched oak trusses by the oak frame supplier.
3. CHIMNEY STACK: R95 / R96 cut to DOUBLE trimmers TR1-TR4 (2/47x245 C24, square to the slope), R97 doubled (R97x). The stack inside the gable sits on a UB lintel + trimmers at +3,341 on SHS posts (engineer).
4. LOAD PATH (red rings): (E1) H02 hip head, H03 hip head; (E2) H02 hip foot, V01 valley head - no timber prop / girder, on the steels (engineer).
5. 150 No. TCP47 rafter clips (uplift up to 0.9 kN); straps / restraint, wind / snow to the engineer (England, Building Regulations). Levels mm above the lower FFL 124.400.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Nudura proposal Rev A

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE

VAULTED ROOF STRUCTURE

Rafters, hips, valley, stack trimming, indicative steels + oak trusses

SCALE	SIZE	DATE
1:125	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-RF-01	-