
SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

GA PLAN DETAIL - WINDOW JAMB (L1-DW-03)

1:5 - cut from the model at +2,150 (upper zone FFL +600); the other jamb is handed

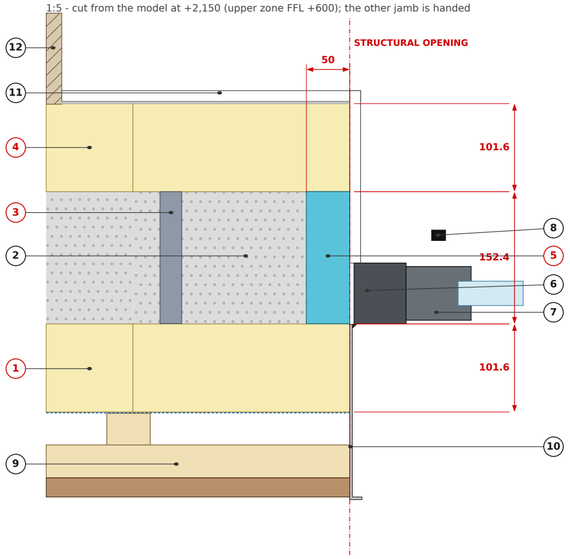


1. 6in XR35 external EPS panel 101.6 - runs to the structural opening; NO 25 overfly in the model (see note 3)
2. Concrete core 152.4 (rebar + pour by the contractor / engineer)
3. Nudura web (one shown where cut)
4. 6in XR35 internal EPS panel 101.6
5. Nudura 6in END CAP closing the core at the jamb (L1-DW-03 left cap, 50 deep) - supplied with the forms
6. Alu-clad timber outer frame 70, RAL 7016 - in the opening, 5 clear of the end cap, outer face on the back of the external EPS line; fixings + tapes by the window supplier
7. Alu-clad casement sash + 28 DGU (by the window supplier)
8. Handle (ironmongery)
9. Ventilated vertical timber cladding (charred larch or similar, spec TBC) on 38 x 50 battens + counter-battens, breather membrane on the EPS (Bill 1A.1) - by others, design assumption
10. Aluminium reveal trim + sealant / closer joint to the frame (Bill 1A.7 / 1A.8) - by others
11. 12.5 plasterboard on dabs + fixings into the webs (thermal barrier to the EPS) and the board reveal (Bill 2A.1 / 2A.5) - by others
12. Blockwork partition TYPE A (A3 kitchen / pantry) - by others

OPENING DETAILS - AS MODELLED (quotation)

L1-DW-03, 910 x 1,060 alu-clad casement, south wall, upper zone (FFL +600 = 125.000): structural opening +1,648 to +2,708. Typical of the windows in the 6in XR35 walls.
Nudura supply: 6in XR35 forms, END CAPS at the jambs and LINTEL CAPS at the head and cill (pre-cut service cuts the courses to the opening lines). The concrete core spans the head - reinforcement by the engineer (no structural design yet).
NO 25 OVERFLY: the model's openings are flush (outer EPS cut on the structural opening at the jambs and head) while the joinery is set out 'tight to the back of a 25 overfly'. Confirm with the architect / window supplier: flush reveal with a trim (as drawn) or a 25 EPS return over the frame.
Frames, cills, boards, trims, tapes and fixings by the window supplier / others - design assumption.

SECTION DETAIL - WINDOW HEAD (L1-DW-03)


1:5 - cut from the model at x 9,955 (opening centre); inside left, outside right

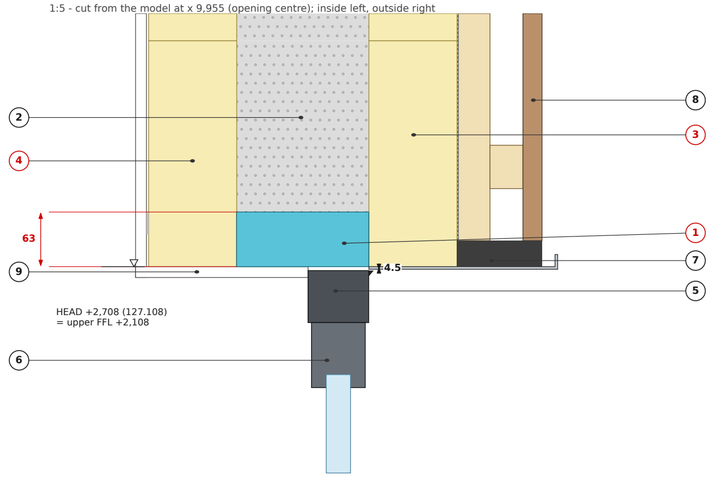

1. Nudura 6in LINTEL CAP 63 at the head (L1-DW-03_HeadLintel) - closes the core over the opening; supplied with the forms
2. Concrete core spans the opening - head reinforcement by the engineer (no structural design yet)
3. 6in XR35 external EPS 101.6 - cut flush at the head, NO 25 overfly (note 3)
4. 6in XR35 internal EPS 101.6
5. Alu-clad outer frame 70 (RAL 7016) - 4.5 below the lintel cap; packers, fixings, tapes and seal by the window supplier
6. Sash + 28 DGU (by the window supplier)
7. Aluminium head trim / drip + insect mesh at the cladding stop (Bill 1A.6 / 1A.7) - by others
8. Vertical timber cladding on battens / counter-battens + breather membrane (Bill 1A.1) - by others
9. 12.5 plasterboard soffit + reveal, board on dabs to the wall (Bill 2A.1 / 2A.5)

SECTION DETAIL - WINDOW CILL (L1-DW-03)

1:5 - cut from the model at x 9,955; inside left, outside right

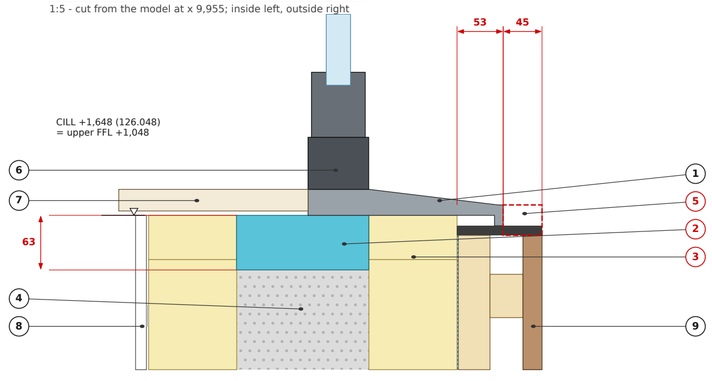

1. Aluminium cill 225, RAL 7016 (as modelled) on the ICF + core cut flat at the cill line - nose only 53 past the EPS face
2. Nudura 6in LINTEL CAP 63 as the cill closer (L1-DW-03_SillLintel) - closes the core under the opening; supplied with the forms
3. Pre-cut course C4 (50.8) - the course under the cill cut to the cill line (pre-cut service)
4. Concrete core 152.4
5. CILL SHORT OF THE CLADDING: the 225 cill stops 45 inside the board face - a 300 cill (or cill extension) is needed to drip clear of the 98 cladding zone - window supplier / architect to confirm
6. Alu-clad outer frame 70 + sash + 28 DGU (by the window supplier)
7. Internal window board on packers (Bill 4) - by others
8. 12.5 plasterboard on dabs, thermal barrier (Bill 2A.1)
9. Vertical timber cladding + insect mesh / closer under the cill (Bill 1A.1 / 1A.6)

NOTES

1. Views cut from the BuildEase model (LF2_build.skp) at true 1:5 - L1-DW-03, typical of the XR35 openings.
2. Red = Nudura ICF / BuildEase items. Yellow = EPS, grey = concrete core, cyan = Nudura end / lintel caps.
3. No 25 overfly in the model: outer EPS flush with the structural opening - architect / window supplier to confirm the reveal.
4. The 225 cill stops 45 short of the 98 cladding face - window supplier to size the cill.
5. Joinery, cladding, linings and trims by others - design assumptions (BOQ Bills 1, 2, 4, 8).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
OPENING DETAILS - JAMB, HEAD AND CILL

SCALE	SIZE	DATE
1:5 @ A2	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-DT-01	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.