
SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

SECTION DETAIL - LIFT-AND-SLIDE THRESHOLD (L1-DW-06)

1:5 - cut from the model at y 2,000, west wall, lower zone (FFL 0 = 124.400); inside left, outside right

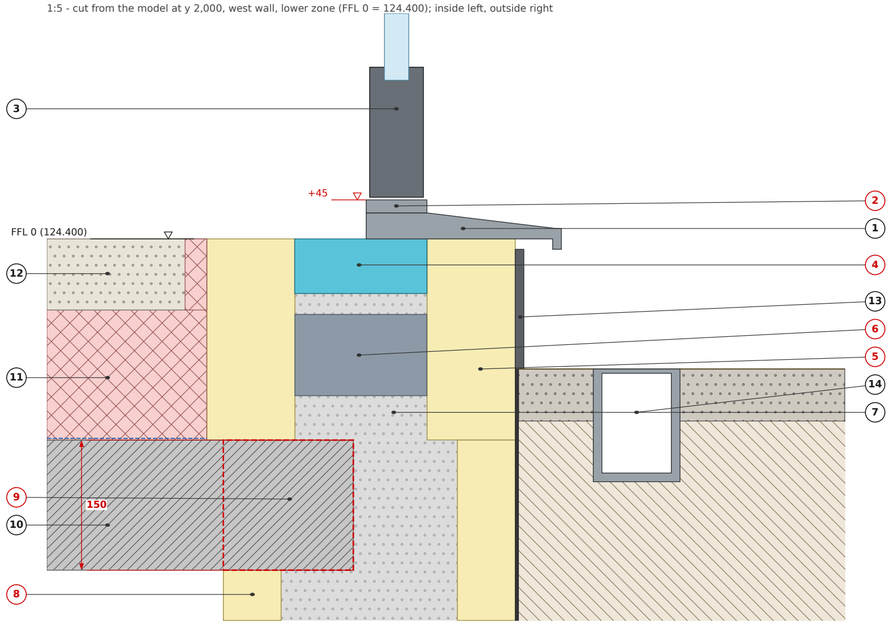

1 Aluminium door cill 225, RAL 7016 (as modelled) on the ICF top at FFL

2 Door frame 70 + 15 low threshold: TOP +45 ABOVE THE FLOOR - over the 15 max upstand for level (Part M) access; lower the ICF / cill 30 under the door - door supplier / architect to confirm

3 Glazed lift-and-slide leaf + 28 DGU toughened (by the door supplier)

4 Nudura 6in LINTEL CAP 63 as the threshold closer (L1-DW-06_SillLintel) - supplied with the forms

5 L1 6in XR35 course PRE-CUT to 231.8 under the door - top at FFL 0 (pre-cut service)

6 Nudura web (cut)

7 Concrete core

8 8in Standard footing course FB-Lower (66.7 / 203.2 / 66.7), top -231.8 (124.168)

9 B&B end in the 150 CUT off the inside face of the footing course (red dashed - not cut in the model) - see DT-03

10 150 precast beam and block floor (beam supplier design) - by others

11 DPM / gas membrane + 150 PIR floor insulation (Bill 6B)

12 82 screed to FFL 0 + 25 PIR edge upstand at the ICF (Bill 6B / 6C.5)

13 Plinth render on the EPS above the ground, protection board / DPM below (Bill 1A.5 / 6A.2)


14 Linear drainage channel + paving - ground ASSUMED ~150 below FFL (BOQ): level access needs the paving brought up to the cill - landscape / architect (by others)

THRESHOLDS - AS MODELLED (quotation)

Both thresholds sit 30 above the finished floor on the cill, plus the 15 frame threshold = +45 above the floor inside. Approved Document M level access allows a 15 max total upstand: drop the ICF under the doors by 30 (pre-cut) and recess the cills, or raise the external paving with a drainage channel - architect / door supplier to confirm before the forms are cut.
Ground levels are not surveyed: the BOQ assumes ~150 below each zone FFL.
Nudura supply: the XR35 forms pre-cut to the threshold line, the lintel cap under DW-06 (none is modelled under DX-08). Doors, cills, thresholds, paving and drainage by others.

SECTION DETAIL - ENTRANCE DOOR THRESHOLD (L1-DX-08)

1:5 - cut from the model at x 7,388, north wall, upper zone (FFL +600 = 125.000); inside left, outside right

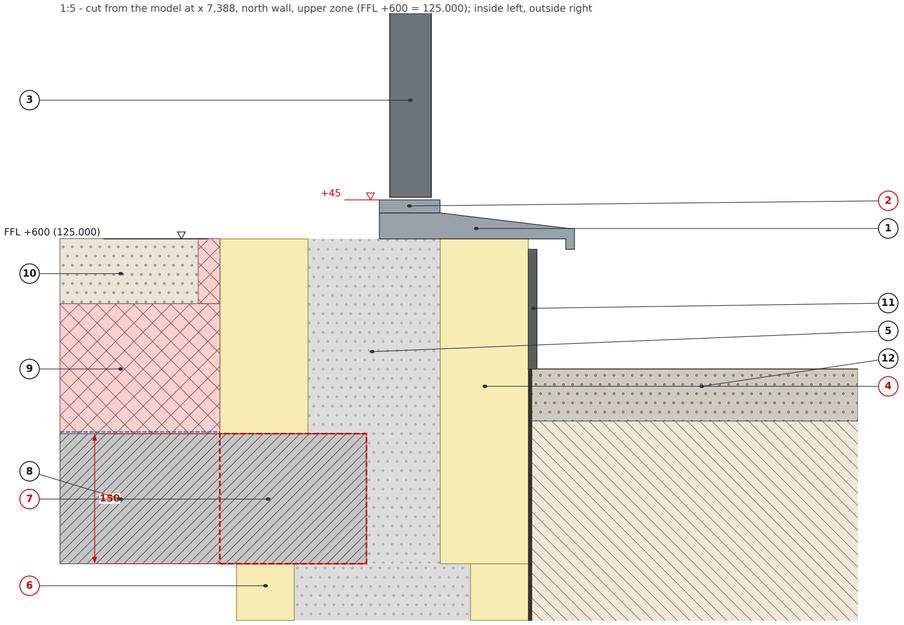

1 Door cill 225 (as modelled) on the ICF top at FFL

2 Door frame 70 + 15 low threshold: TOP +45 ABOVE THE FLOOR - over the 15 max Part M upstand; lower the ICF / cill 30 - door supplier / architect to confirm

3 Composite door leaf 48, multi-point lock (by the door supplier)

4 L1 6in XR35 first course PRE-CUT to 374.6 under the door - top at FFL +600; NO lintel / cill cap modelled under DX-08 (core finished flat to FFL)

5 Concrete core

6 8in Standard footing course FB-Upper, top +225.4 (124.625)

7 B&B end in the 150 CUT off the inside face of the first XR35 course, bearing on the footing course (red dashed - not cut in the model) - see DT-03

8 150 precast beam and block floor (beam supplier design) - by others

9 DPM / gas membrane + 150 PIR floor insulation (Bill 6C)

10 75 screed to FFL +600 + 25 PIR edge upstand (Bill 6C / 6C.5)

11 Plinth render above the ground, protection board / DPM below (Bill 1A.5 / 6A.2)

12 Paving / step - ground ASSUMED ~150 below FFL (BOQ); level access by the landscape design

NOTES

1. Views cut from the BuildEase model at true 1:5. Red = Nudura ICF / BuildEase items.
2. Thresholds +45 above FFL as modelled - over the Part M 15 max upstand: RFI architect / door supplier.
3. B&B bearings: the 150 cut off the inside face of the ICF is NOT cut in the model panels (red dashed).
4. External levels ASSUMED ~150 below each zone FFL (BOQ) - not surveyed.
5. Doors, cills, floors, paving and drainage by others - design assumptions (BOQ Bills 6, 8).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
THRESHOLD DETAILS - LIFT-AND-SLIDE AND ENTRANCE DOOR

SCALE	SIZE	DATE
1:5 @ A2	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-DT-02	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.