
SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

SECTION DETAIL - LOWER ZONE BEARING (S wall)

1:10 - cut from the model at x 8,000; lower zone FFL 0 = 124.400; inside left, outside right

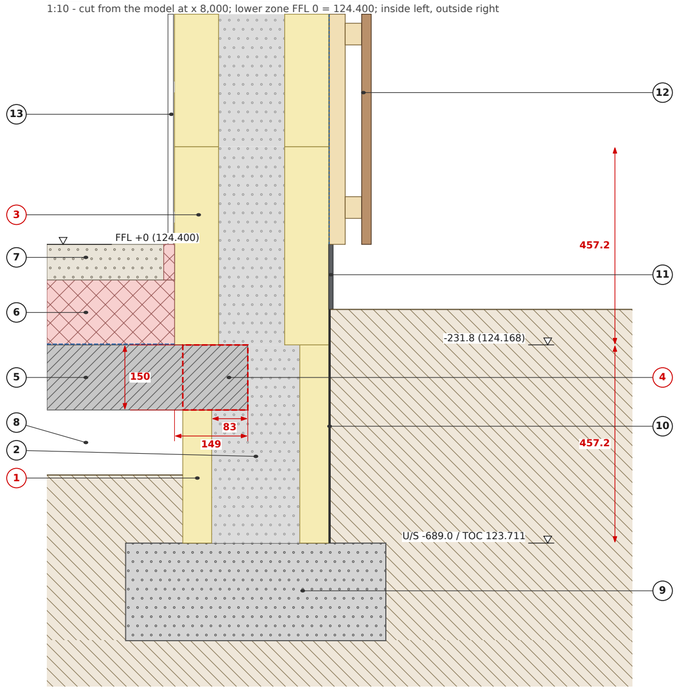

1 Nudura 8in STANDARD footing course FB-Lower (66.7 EPS / 203.2 core / 66.7 EPS, 457.2 high), U/S -689.0 (123.711)

2 Concrete core of the footing course (starter bars from the footing - engineer)

3 Nudura 6in XR35 above (101.6 / 152.4 / 101.6) - outer faces flush with the 8in Standard, inner face 19 proud

4 150 CUT TO THE INSIDE FACE of the ICF at the bearing (red dashed; the panels are NOT cut in the model) - B&B end 149 into the wall, 83 of it on the concrete core (Tom's decision; beam supplier / engineer to confirm the bearing)

5 150 precast beam and block (beam supplier design) - lowered 7 so the floor build-up fits, no rip strip

6 DPM / gas membrane + 150 PIR floor insulation (Bill 6B / 6C)

7 82 screed to FFL + 25 PIR edge upstand

8 Ventilated sub-floor void (150 min) - vents / sleeves through the ICF formed BEFORE the pour (Bill 6A.5)

9 Concrete strip footing under the footing course - size, depth, reinforcement by the engineer, as the architect's section (shown indicative 600 x 225) - by others

10 Protection board / DPM to the below-ground EPS (Bill 6A.2)


11 Plinth render on the EPS, ground ~150 below FFL (ASSUMED) to FFL (Bill 1A.5)

12 Vertical timber cladding on battens + breather membrane from FFL (Bill 1A.1)

13 12.5 plasterboard on dabs + fixings to the webs (Bill 2A.1)

SECTION DETAIL - UPPER ZONE BEARING (N wall)

1:10 - cut from the model at x 8,000; upper zone FFL +600 = 125.000; inside left, outside right

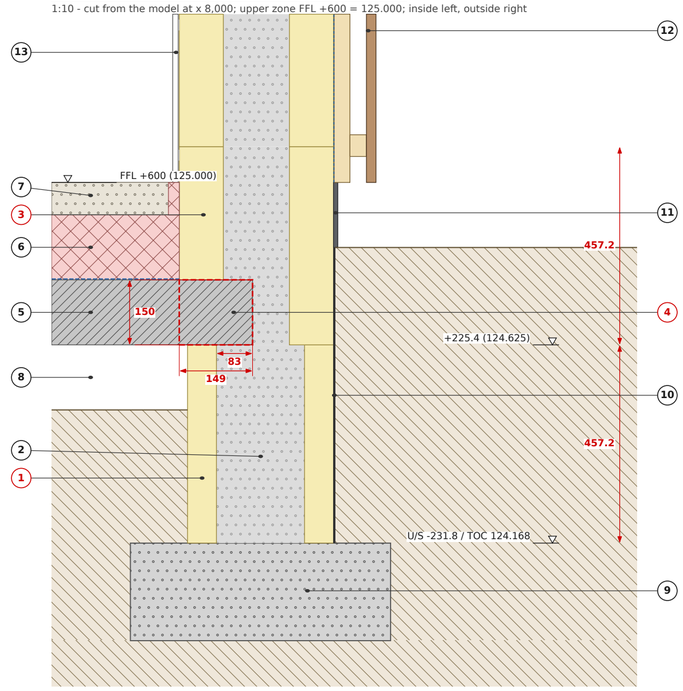

1 Nudura 8in STANDARD footing course FB-Upper (66.7 EPS / 203.2 core / 66.7 EPS, 457.2 high), U/S -231.8 (124.168)

2 Concrete core of the footing course (starter bars from the footing - engineer)

3 Nudura 6in XR35 above (101.6 / 152.4 / 101.6) - outer faces flush with the 8in Standard, inner face 19 proud

4 150 CUT TO THE INSIDE FACE of the ICF at the bearing (red dashed; the panels are NOT cut in the model) - B&B end 149 into the wall, 83 of it on the concrete core (Tom's decision; beam supplier / engineer to confirm the bearing)

5 150 precast beam and block (beam supplier design)

6 DPM / gas membrane + 150 PIR floor insulation (Bill 6B / 6C)

7 75 screed to FFL + 25 PIR edge upstand

8 Ventilated sub-floor void (150 min) - vents / sleeves through the ICF formed BEFORE the pour (Bill 6A.5)

9 Concrete strip footing under the footing course - size, depth, reinforcement by the engineer, as the architect's section (shown indicative 600 x 225) - by others

10 Protection board / DPM to the below-ground EPS (Bill 6A.2)

11 Plinth render on the EPS, ground ~150 below FFL (ASSUMED) to FFL (Bill 1A.5)

12 Vertical timber cladding on battens + breather membrane from FFL (Bill 1A.1)

13 12.5 plasterboard on dabs + fixings to the webs (Bill 2A.1)

FOOTING COURSE AND BEARINGS - AS MODELLED (quotation)

One course of Nudura 8in Standard (336.6 wide) in each floor zone on a concrete strip footing by others; 6in XR35 (355.6) above, outer faces flush. Lower zone (kitchen / dining / snug, FFL 124.400): U/S footing course -689 (TOC 123.711), the B&B sits IN the footing course. Upper zone (all other rooms, FFL 125.000): U/S -231.8 (TOC 124.168), the B&B bears on top of the footing course inside the first XR35 course.
BEARING (Tom's decision): a 150 cut to the INSIDE face of the ICF at the bearing, the beam ends 149 into the wall - 83 on the concrete core, the rest over cut EPS. 83 is short of the usual 100 beam bearing: beam supplier / engineer to confirm (the panels are not yet cut in the model).
Footing, vents, DPM / gas membrane and the floor by others - design assumptions (BOQ Bill 6).

NOTES

1. Views cut from the BuildEase model at true 1:10. Red = Nudura ICF / BuildEase items.
2. 150 cut to the inside face of the ICF at every B&B bearing; beams 149 into the wall, 83 on the core - beam supplier / engineer to confirm.
3. Strip footings by others (size by the engineer), shown indicative after the architect's section A-A.
4. Ground ASSUMED ~150 below each zone FFL (BOQ). Levels mm above the lower FFL 124.400.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
FOOTING COURSE AND BLOCK-AND-BEAM BEARINGS

SCALE	SIZE	DATE
1:10 @ A2	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-DT-03	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.