
SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

SECTION DETAIL - EAVES, WALL PLATE ON THE ICF CORE

1:5 - cut from the model at x 6,700 on rafter R111, north wall; inside left, outside right

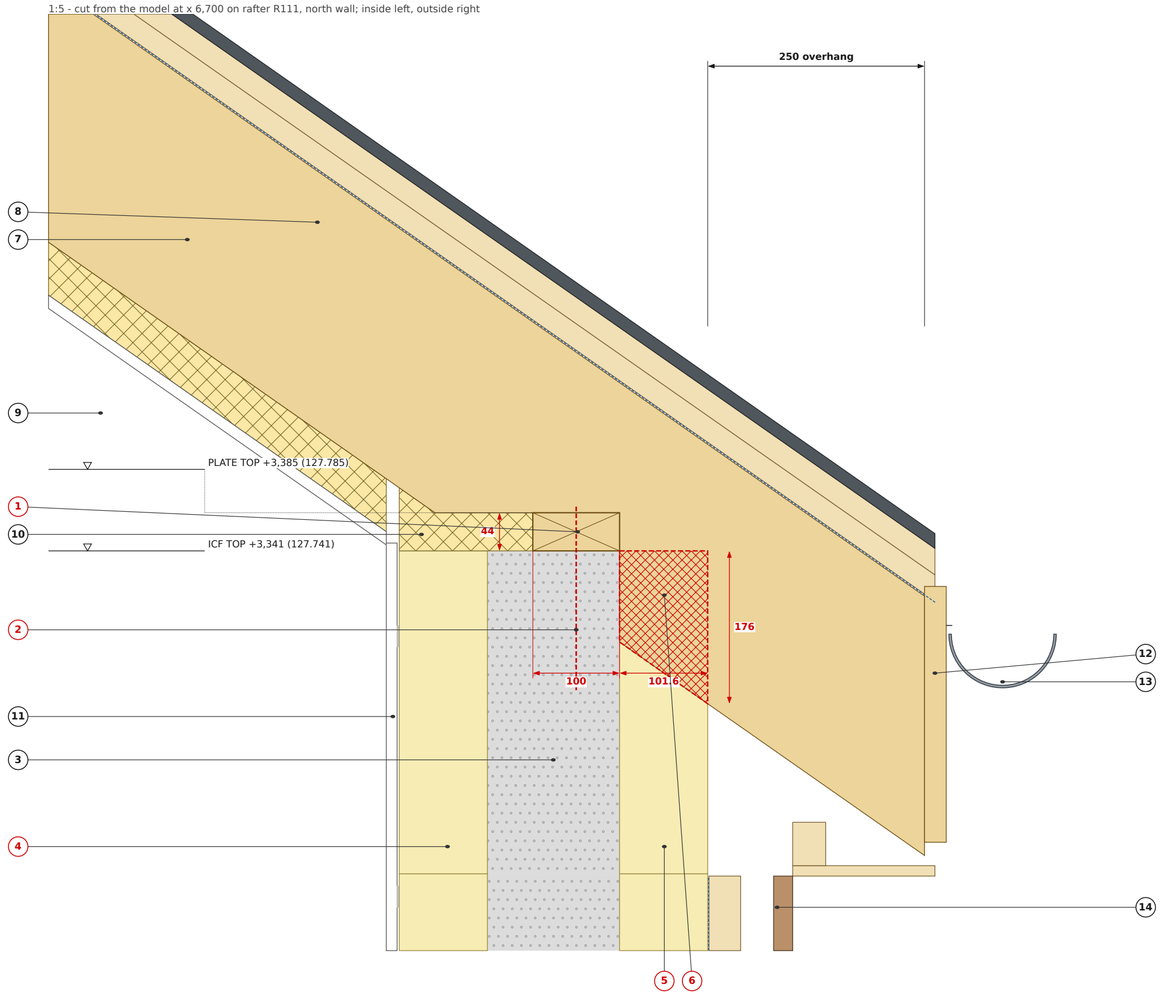

1 WALL PLATE on the concrete core, 101.6 to 201.6 from the outer ICF face - modelled 100 x 44 (BOQ 7A says 47 x 100), top +3,385; bedded on the core

2 Resin anchors / holding-down straps into the core at max centres (roof designer / engineer) - the plate bears on the CONCRETE CORE ONLY

3 Concrete core 152.4, top +3,341 (127.741)

4 6in XR35 internal EPS 101.6 - formwork + insulation, not structural

5 6in XR35 external EPS 101.6, top +3,341

6 CLASH: the R111 birdsmouth heel drops 150 below the seat (50% of the 299 plumb depth) and runs 105-176 INTO THE OUTER EPS - notch the EPS at every rafter (pre-cut) or deepen the plate / shallow the birdsmouth - roof designer to resolve

7 R111 common rafter 47 x 245 C24 @ 400, 35 deg, birdsmouth on the plate, 250 overhang (BCDS framer - roof designer to confirm)

8 Slate (spec TBC) on 25 x 50 battens + 25 counter-battens + breather membrane (Bill 7C)

9 Warm roof: insulation between the rafters (beyond) + insulated board under, VCL, 12.5 plasterboard to the slope (Bill 7D / 2B) - SAP to confirm

10 Insulation closer / packing over the wall head between the rafters (Bill 7D.3)

11 12.5 plasterboard on dabs to the ICF (Bill 2A.1)

12 Fascia on the rafter plumb cut + ventilated soffit (Bill 7C.8 / 7C.9)

13 Gutter, aluminium RAL 7016 (Bill 7C.10)

14 Vertical timber cladding on battens + breather membrane, ventilated / insect mesh at the soffit (Bill 1A.1 / 1A.10)

EAVES - AS MODELLED (quotation)

The roof bears on the 152.4 concrete core only - the EPS either side is formwork and insulation. Wall plate top +3,385 (127.785) on the ICF top +3,341 (127.741).
CLASH found in the model: each common rafter's birdsmouth heel cuts 105 (at the plate) to 176 (at the outer face) into the 101.6 outer EPS panel.
Options: a deeper plate (e.g. 47 x 150) so the heel stops on the plate, a shallower birdsmouth (max 1/3 depth), or pre-cut notches in the outer panel at 400 centres. Roof designer / BuildEase to decide before the forms are cut.
Rafters, plate fixings, clips / straps, coverings, insulation and rainwater by others - design assumptions (BOQ Bill 7).

NOTES

1. Cut from the BuildEase model at true 1:5 on rafter R111 (north wall, x 6,700). Red = Nudura ICF / BuildEase items.
2. Plate on the concrete core only; anchors / straps / clips by the roof designer or engineer.
3. CLASH: rafter birdsmouth heels cut 105-176 into the outer EPS - to resolve before the pre-cut.
4. Model plate 100 x 44 vs BOQ 47 x 100 - confirm the plate section.
5. Coverings, warm-roof insulation and rainwater by others (BOQ Bill 7).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
EAVES DETAIL - WALL PLATE ON THE ICF CORE

SCALE	SIZE	DATE
1:5 @ A2	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-DT-04	-

Do not scale. All dimensions in millimetres. levels in metres from GF FFL. Check all dimensions on site.