
SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

SECTION DETAIL - GABLE VERGE (W gable)

1:10 - cut from the model at y 3,000 across the rafters; inside left, outside right

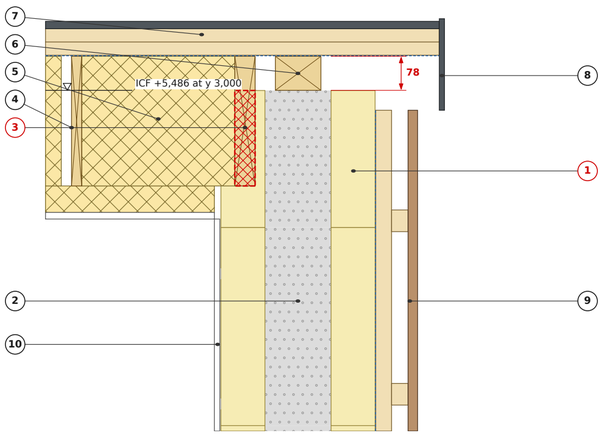

1 L2 gable 6in XR35 RAKED to the roof - top +5,486 at y 3,000, 78 below the rafter top (pre-cut service)

2 Concrete core 152.4 to the raked top

3 CLASH: first rafter R127 (x 277-324) sits 47 x 221 INSIDE the gable's internal EPS - move it clear of the inner face (x >= 356) or notch the panel; same at R95 on the north slope - roof designer

4 R128 common rafter 47 x 245 C24 @ 400 (cut at 35 deg)

5 Insulation between the rafters + insulated board under, VCL, 12.5 plasterboard (Bill 7D / 2B)

6 Verge packer / gable-ladder bearer on the raked core top, fixed into the core (roof designer - design assumption)

7 Slate on battens + counter-battens + breather membrane (Bill 7C)


8 Dry verge with undercloak over the cladding (Bill 7C.7)

9 Vertical timber cladding on the gable, vented at the verge (Bill 1A.1 / 1A.10)

10 12.5 plasterboard on dabs to the gable (Bill 2A.2)

SECTION DETAIL - VAULT UPSTAND (NE set-back wall)

1:10 - cut from the model at y 6,700, square to the wall; the jack hips, plate and PFC cross it obliquely

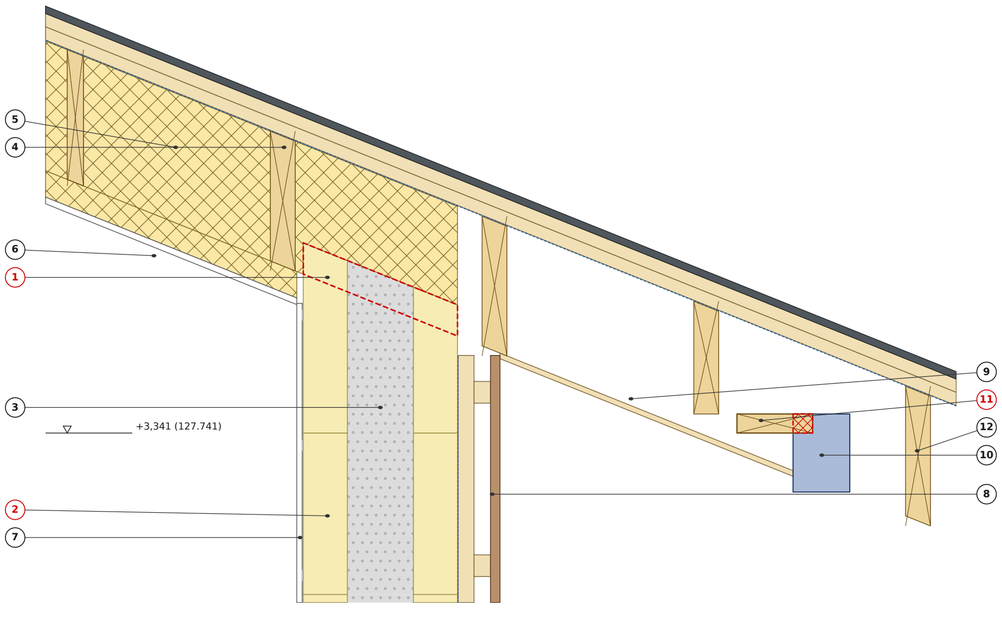

1 UPSTAND: L2 6in XR35 raised on the L1 wall into the vault, raked top +3,780 / +3,637 - 74 ABOVE THE JACK-HIP UNDERSIDE at this cut (red dashed): every jack hip crossing the wall would clash - re-rake the top to the rafter underside (pre-cut)

2 L1 6in XR35 corner / straight forms below the plate line +3,341

3 Concrete core

4 Jack hips JH50-JH54 47 x 245 C24 (cut obliquely) - roof designer

5 Slate on battens + counter-battens + breather membrane (Bill 7C)

6 Insulation between the rafters + board under, VCL, 12.5 plasterboard (Bill 7D / 2B)

7 12.5 plasterboard on dabs to the ICF (Bill 2A.2)

8 Vertical timber cladding to the upstand, vented at the soffit (Bill 1A.1)

9 Soffit boarding under the set-back roof (Bill 7C.9)

10 PFC 180 x 75 eaves beam over the set-back (INDICATIVE - engineer)

11 CLASH: wall plate 3 sits beside the PFC at the same top level (+3,385), overlapping it ~26 - seat the plate ON the PFC (roof designer / engineer)

12 Rafter tail to the eaves beyond

NOTES

1. Cut from the BuildEase model at true 1:10. Red = Nudura ICF / BuildEase items.
2. Gables and upstands are pre-cut raked to the roof; the core is poured to the raked top.
3. CLASH: R127 (and R95) inside the W gable inner EPS; upstand top 74 above the jack-hip underside at y 6,700; plate 3 beside, not on, the PFC.
4. Verge framing, coverings, insulation and linings by others - design assumptions (BOQ Bills 1, 2, 7).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
GABLE VERGE AND VAULT UPSTAND

SCALE	SIZE	DATE
1:10 @ A2	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-DT-05	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.