
SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION


SECTION A - STACK ACROSS THE SLOPE

1:20 - cut from the model at y 6,390 (stack centre); outside (west) left

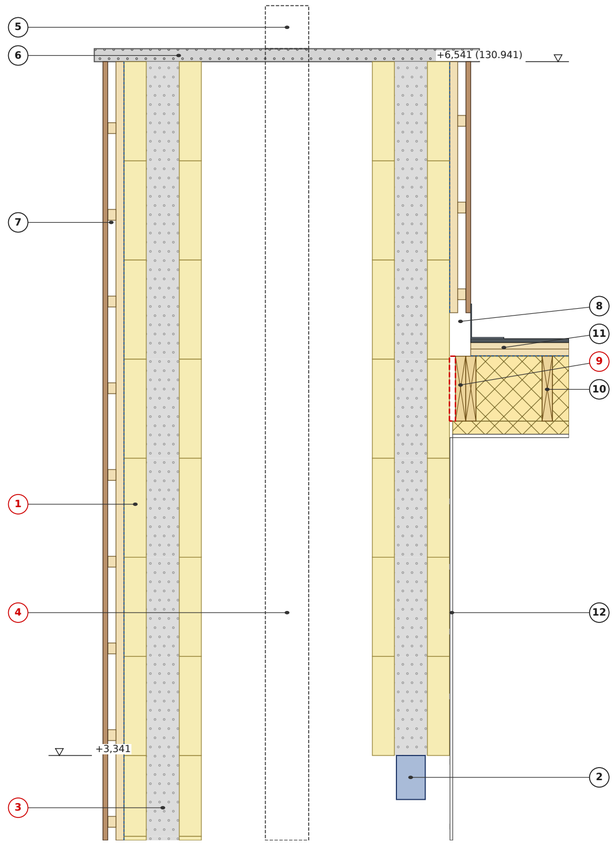

SECTION B - STACK DOWN THE SLOPE

1:20 - cut from the model at x 500 through the flue; ridge left, north eaves right; looking west

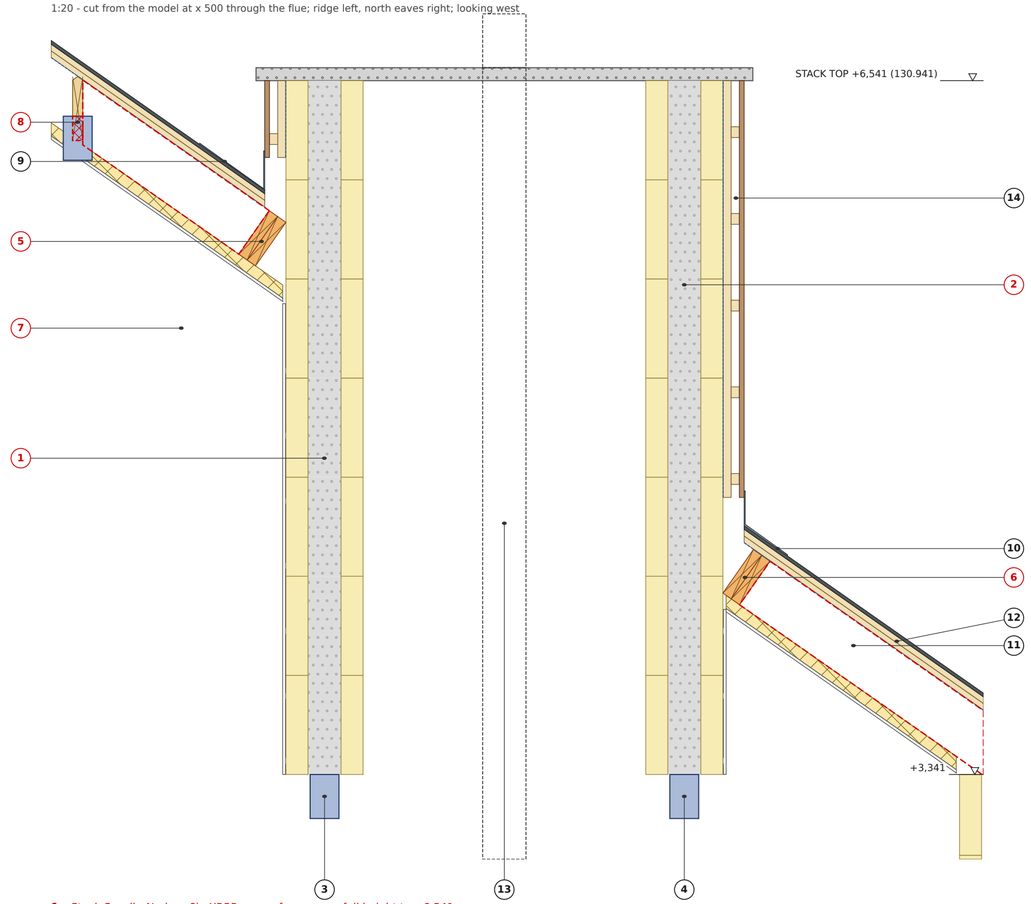

1 Stack walls: Nudura 6in XR35 corner forms CR01-CR04, a deep box over the flue to +6,541 (130.941) - concrete core full height

2 UB 203 x 133 stack lintel on the INSIDE face carrying the east stack wall's core, on SHS posts (INDICATIVE - engineer)

3 L1 6in XR35 corner forms below (gable line) - the west wall bears on them

4 Flue / twin-wall system chimney by the stove installer (shown dashed) - FLUE HEIGHT PER APPROVED DOCUMENT J: RFI to the stove installer

5 Flue terminal / cowl (stove installer)

6 Stack capping with drips (Bill 1A.2 / 7C.13) - by others

7 Timber cladding to the stack (Bill 1A.2)

8 Lead soakers + stepped cover flashing at the stack sides (Bill 7C.13)

9 R97 doubled with R97x as the trimming rafter, 47 x 245 C24 - only 28 from the stack face (red dashed): Approved Document J asks >= 40 from a chimney - check with the flue design

10 R98 / R99 commons @ 400, insulation between + board under (Bill 7D)

11 Slate on battens + counter-battens + membrane (Bill 7C)

12 12.5 plasterboard to the stack inside the room (Bill 2A.2)

1 Stack S wall - Nudura 6in XR35 corner forms, core full height to +6,541

2 Stack N wall - Nudura 6in XR35 corner forms

3 UB 203 x 133 stack trimmer S under the wall core (INDICATIVE - engineer)

4 UB 203 x 133 stack trimmer N under the wall core (INDICATIVE - engineer)

5 TR1 / TR2 DOUBLE trimmer 2 / 47 x 245 C24 at the stack head - tight (0) to the stack face: Approved Document J clearance to check

6 TR3 / TR4 DOUBLE trimmer at the stack foot - tight (0) to the stack face

7 R95a / R96a + R95b / R96b cut commons (red dashed): MISSING FROM THE MODEL - lf2_stack_trim.rb re-run erased them and could not re-create them; R95 also clashes with the gable (DT-05)

8 CLASH: RB04 ridge board passes through the UB ridge web (47 x 112) - seat the rafters on a timber plate bolted to the steel (roof designer / engineer)

9 Lead back gutter at the stack head (Bill 7C.13)

10 Lead apron flashing at the stack foot (Bill 7C.13)

11 Warm roof: insulation between + under the rafters, VCL, 12.5 plasterboard (Bill 7D / 2B)

12 Slate on battens + counter-battens + membrane (Bill 7C)

13 Flue (stove installer) - Approved Document J flue height + clearances: RFI

14 Timber cladding to the stack above the roof (Bill 1A.2)

CHIMNEY STACK - AS MODELLED (quotation)

The stack is a Nudura 6in XR35 box (corner forms, core full height) over the flue, x -451..1,049 / y 5,383..7,398, from the L1 walls and the inside-face UB lintel / trimmers (+3,138..+3,341) to +6,541 (130.941). Steels INDICATIVE - engineer. FLUE HEIGHT, flue system and clearances to combustibles (timber trimmers, R97 at 28 mm, the EPS of the stack itself) per Approved Document J: RFI to the stove installer.
Model defects found: R95a/b + R96a/b missing (stack-trim re-run), RB04 through the UB ridge web.

NOTES

1. Cut from the BuildEase model at true 1:20. Red = Nudura ICF / BuildEase items.
2. Stack steels (UB lintel, trimmers, SHS posts) INDICATIVE - engineer.
3. Flue height per Approved Document J - RFI to the stove installer; clearances of the trimmers / R97 to the stack to check.
4. Cut commons R95a/b, R96a/b missing from the model (red dashed) - to re-create.
5. Flashings, capping, cladding and the roof by others - design assumptions (BOQ Bills 1, 7).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
CHIMNEY STACK THROUGH THE ROOF

SCALE	SIZE	DATE
1:20 @ A2	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-DT-06	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.