

SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

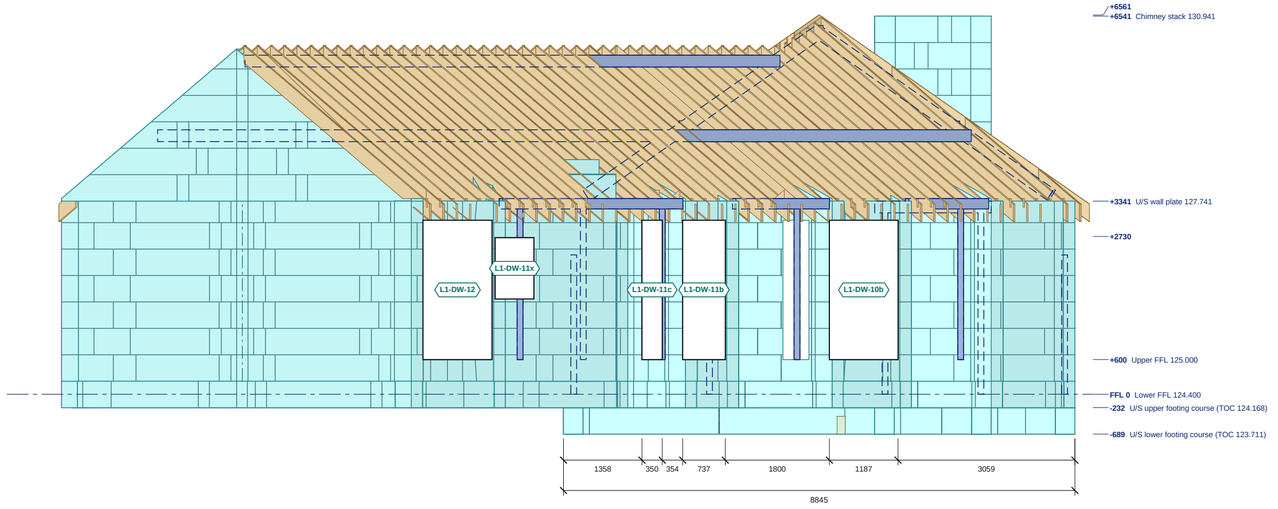

EAST ELEVATION

Scale 1:75 @ A2 | Levels above GF FFL; sills and heads in the schedule

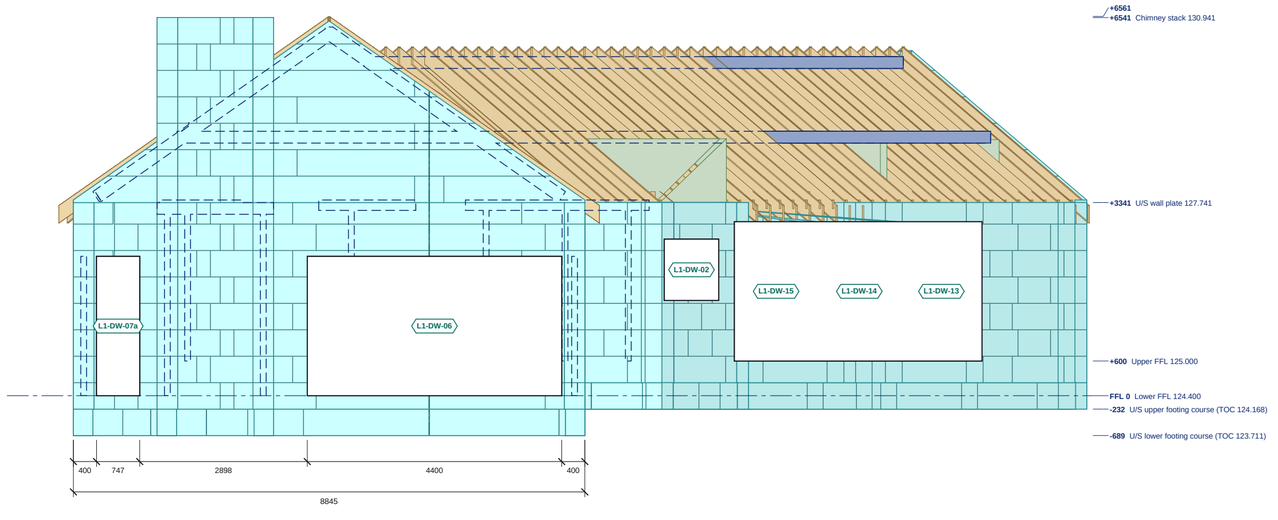

WEST ELEVATION

Scale 1:75 @ A2 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint
Steel
Curved trusses / timbers
GF slab + foundation build-up, ACO

0 1 2 3 4m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

EAST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-DW-12	1600	2410	+600	+3010	-
L1-DW-11x	685	1060	+1648	+2708	-
L1-DW-11c	350	2410	+600	+3010	-
L1-DW-11b	804	2410	+600	+3010	-
L1-DW-10b	1589	2410	+600	+3010	-

Structural openings in the ICF; sill and head above GF FFL.

WEST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-DW-06	4400	2410	0	+2410	-
L1-DW-07a	747	2410	0	+2410	-
L1-DW-02	1160	1060	+1648	+2708	-
L1-DW-15	2035	2410	+600	+3010	-
L1-DW-14	2035	2410	+600	+3010	-
L1-DW-13	2035	2410	+600	+3010	-

Structural openings in the ICF; sill and head above GF FFL.

EAST ELEVATION: LEVELS

Level	FFL
U/S lower footing course (TOC 123.711)	-689
U/S upper footing course (TOC 124.168)	-232
Lower FFL 124.400	0
Upper FFL 125.000	+600
top of ICF	+2730
U/S wall plate 127.741	+3341
Chimney stack 130.941	+6541
top of roof build-up	+6561

WEST ELEVATION: LEVELS

Level	FFL
U/S lower footing course (TOC 123.711)	-689
U/S upper footing course (TOC 124.168)	-232
Lower FFL 124.400	0
Upper FFL 125.000	+600
U/S wall plate 127.741	+3341
Chimney stack 130.941	+6541
top of roof build-up	+6561

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Steel, trusses, masonry and ground floor build-up shown as modelled.
4. See ES26-063-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
EAST AND WEST ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:75	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-EL-02	-