
SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

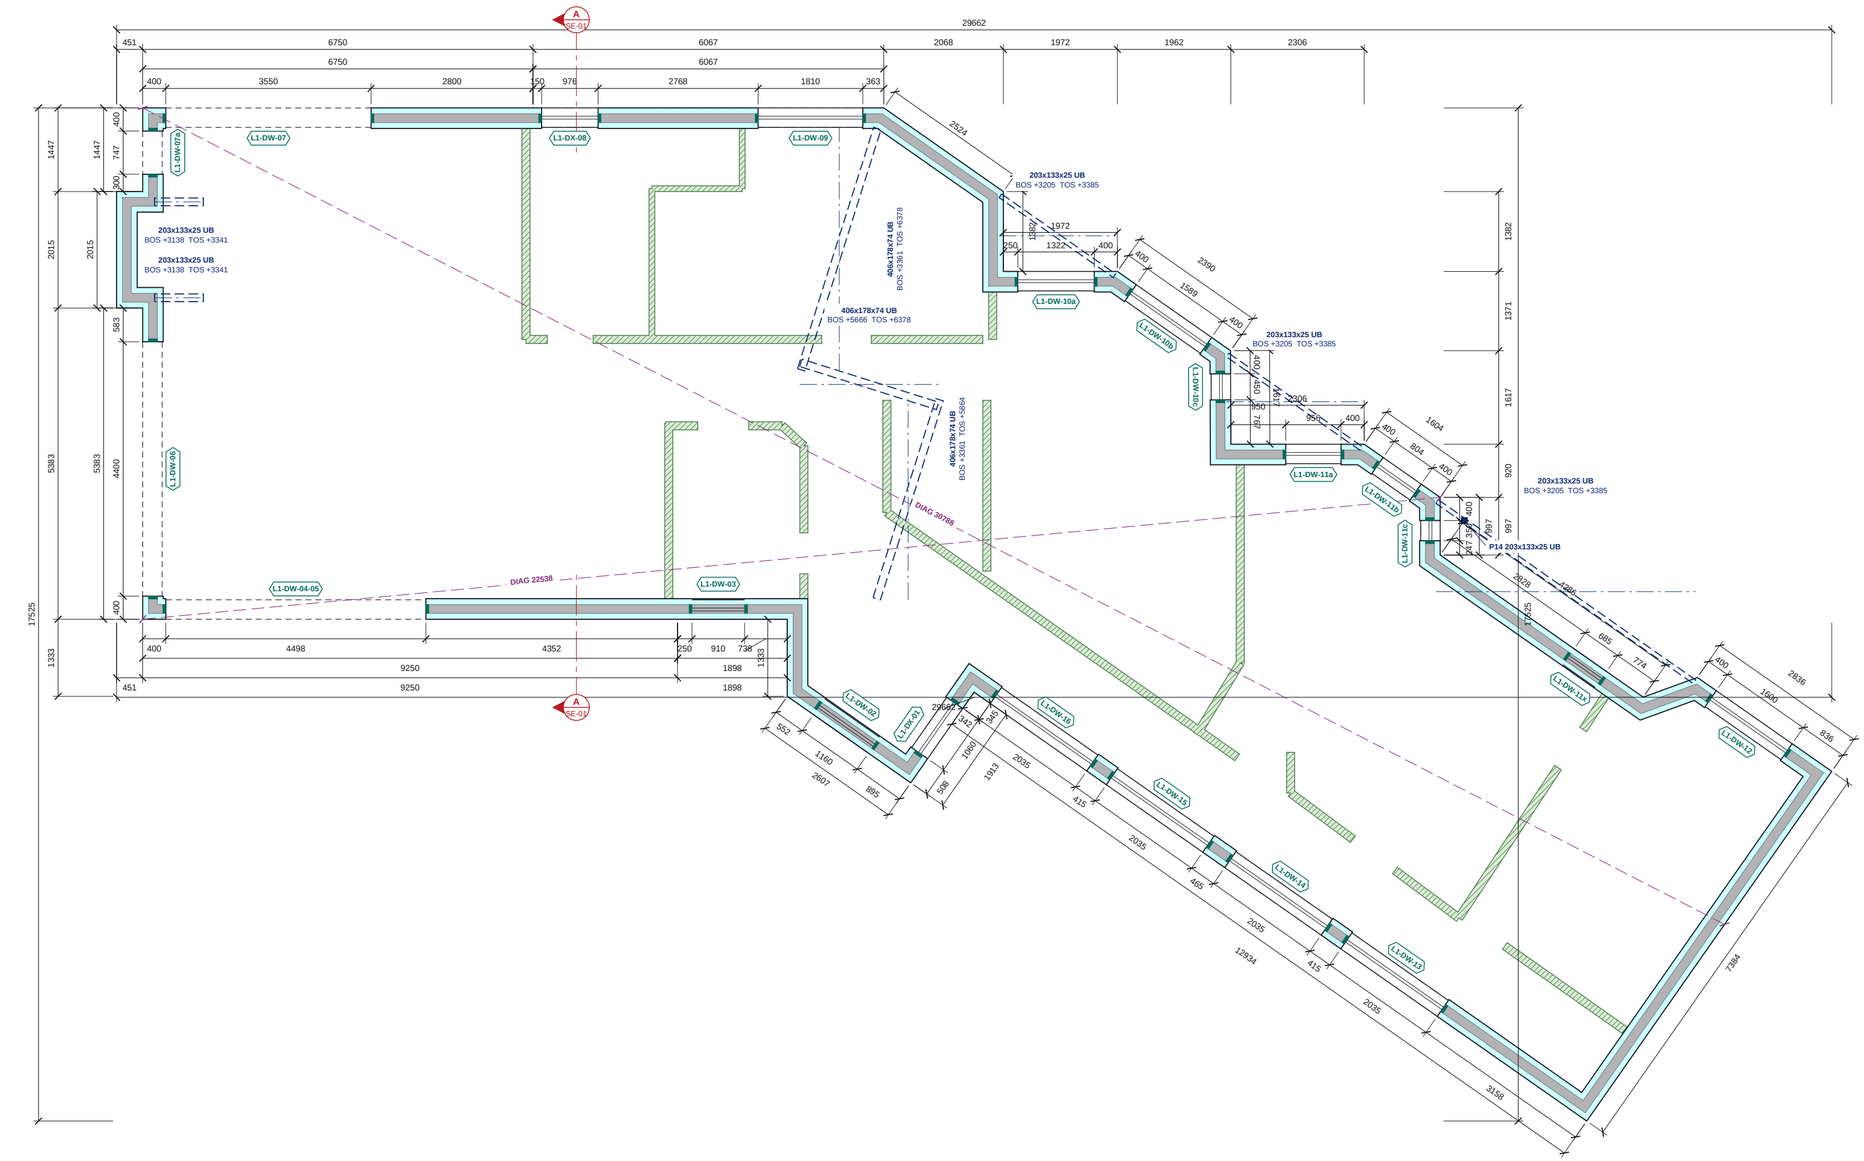

EPS insulation (Nudura form)
Concrete core
End cap at opening
Load-bearing masonry wall (context)
ICF walls of the level below (dashed)
Steel over (dashed), marked
Steel column cut
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

L1 GROUND FLOOR WALLS - XR35 ICF PLAN

Scale 1:75 @ A2 | Plan cut at +1000

0 1 2 3 4m

L1 GROUND FLOOR WALLS - XR35 ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L1-DW-06	4400	2410	0	+2410	-
L1-DW-07a	747	2410	0	+2410	-
L1-DW-07	3550	2410	0	+2410	-
L1-DX-08	976	2110	+600	+2710	-
L1-DW-09	1810	2410	+600	+3010	-
L1-DW-10a	1322	2410	+600	+3010	-
L1-DW-10b	1589	2410	+600	+3010	-
L1-DW-10c	450	2410	+600	+3010	-
L1-DW-11a	956	2410	+600	+3010	-
L1-DW-11b	804	2410	+600	+3010	-
L1-DW-11c	350	2410	+600	+3010	-
L1-DW-11x	685	1060	+1648	+2708	-
L1-DW-12	1600	2410	+600	+3010	-
L1-DW-13	2035	2410	+600	+3010	-
L1-DW-14	2035	2410	+600	+3010	-
L1-DW-15	2035	2410	+600	+3010	-
L1-DW-16	2035	2410	+600	+3010	-
L1-DX-01	1060	2110	+600	+2710	-
L1-DW-02	1160	1060	+1648	+2708	-
L1-DW-03	910	1060	+1648	+2708	-
L1-DW-04-05	4498	2410	0	+2410	-

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
-	406x178x74 UB S355	+3361	+6378
-	406x178x74 UB S355	+5666	+6378
-	406x178x74 UB S355	+3361	+5864
-	203x133x25 UB S355	+3205	+3385
-	203x133x25 UB S355	+3205	+3385
-	203x133x25 UB S355	+3205	+3385
-	203x133x25 UB S355	+3138	+3341
-	203x133x25 UB S355	+3138	+3341
P14	203x133x25 UB S355	+600	+3205

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design yet. ICF per the quotation model: one 8in Standard footing course in each floor zone (lower 124.40 kitchen / dining / snug, upper 125.00 elsewhere), block and beam bearing on it with a 150 mm inside-face cut, 6in XR35 above to the wall plate (127.741), gables raked to the 35 degree roof, the chimney stack to 130.941 and the walls set back from the eaves raised to the vaulted roof. Stack support steel, ridges, purlins, oak trusses and posts for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE
L1 GROUND FLOOR WALLS - XR35 ICF GENERAL ARRANGEMENT

SCALE	SIZE	DATE
1:75	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-GA-03	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.