

SUPPLY SCOPE: Nudura ICF forms and accessories as the Distributor BOM (supplied by the distributor), BuildEase pre-cut service and pre-cut delivery only. Block and beam floors, partitions, the vaulted roof, oak trusses, steels and the chimney support steel are shown in good faith for coordination only and must be checked by the relevant professional (engineer / specialists).

QUOTATION - NOT FOR CONSTRUCTION

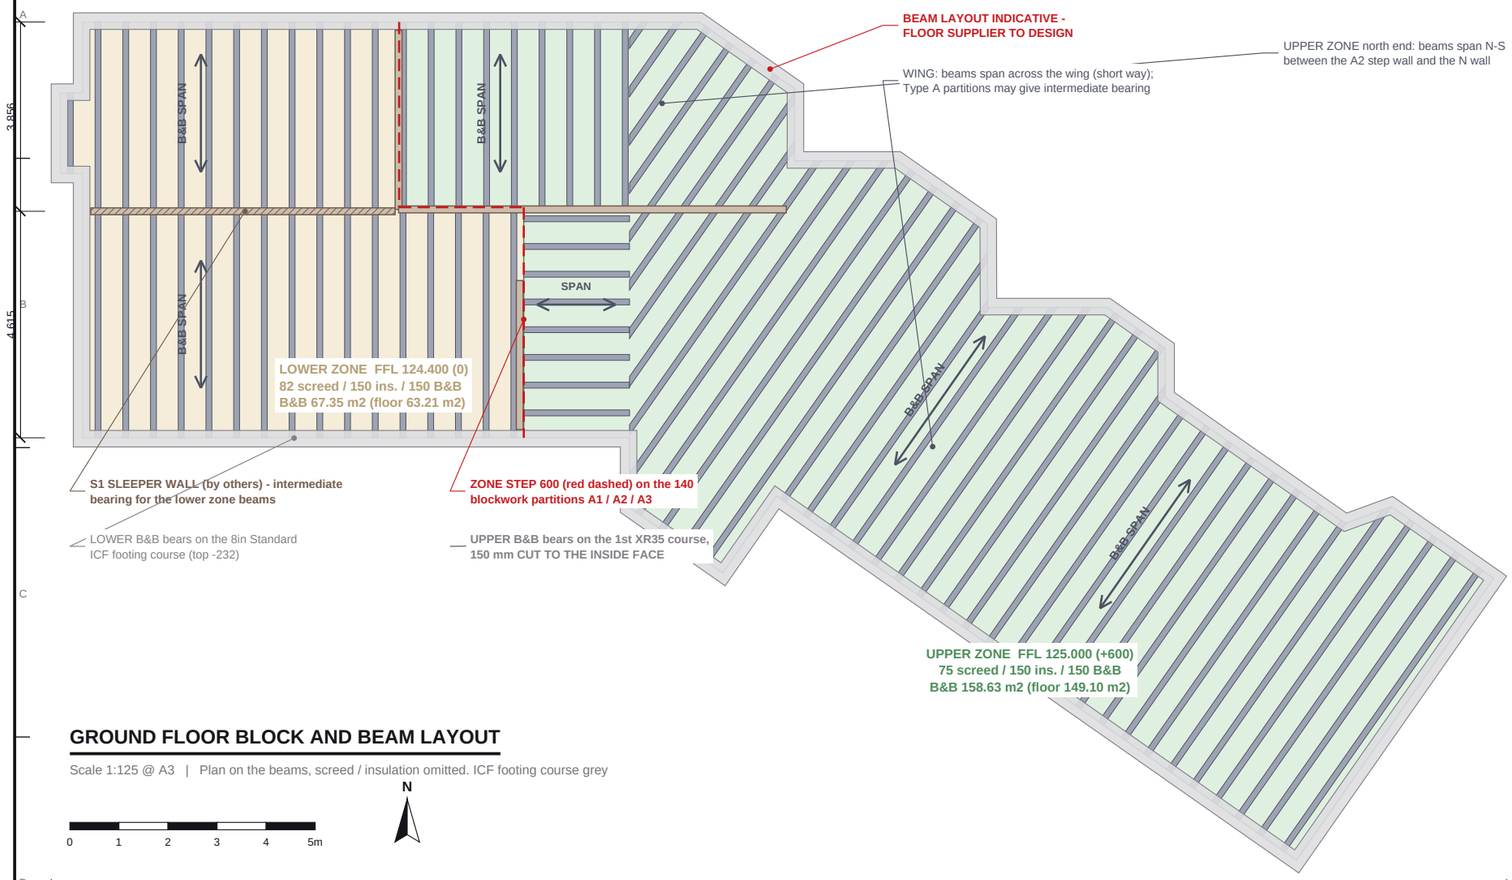


GROUND FLOOR BLOCK AND BEAM LAYOUT

Scale 1:125 @ A3 | Plan on the beams, screed / insulation omitted. ICF footing course grey

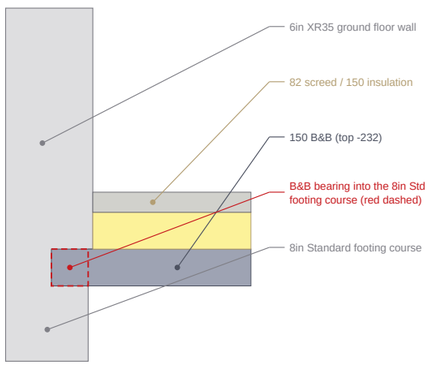

LOWER ZONE BEARING

Scale 1:25 @ A3 | S wall at x 8,000

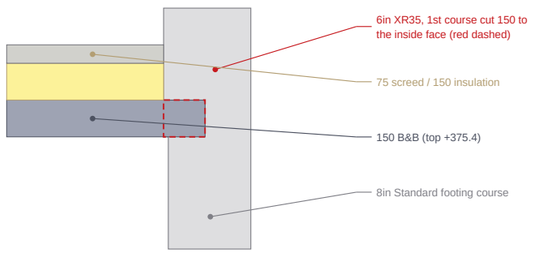

UPPER ZONE BEARING

Scale 1:25 @ A3 | N wall at x 8,000

Lower zone B&B, FFL 124.400
Beam span direction (indicative)
140 blockwork step walls (by others)
Upper zone B&B, FFL 125.000
ICF footing course (bearing)
Zone step 600 / B&B bearing cut (details)
Precast beam (indicative, @565)
S1 sleeper wall (by others)

Do not scale. All dimensions in mm. Check all dimensions on site.

GROUND FLOOR SCHEDULES

FLOOR BUILD-UPS

Layer	mm	Underside
Lower zone - FFL 124.400		
FFL (top of screed)	-	0
Screed	82	-82
Rigid insulation	150	-232
Precast beam + block (B&B)	150	-382
Upper zone - FFL 125.000		
FFL (top of screed)	-	+600
Screed	75	+525
Rigid insulation	150	+375.4
Precast beam + block (B&B)	150	+225.4

FLOOR SUMMARY

Item	Lower	Upper
B&B area incl. bearings (m2)	67.35	158.63
Insulation + screed (m2)	63.21	149.10
Beams @565, indicative (No.)	28	54
Beam run, indicative (m)	116.8	283.2
Infill blocks 440x215x100 (+5%)	583	1,372
Total B&B area (m2)		**225.98**

Beam numbers / run from the indicative layout drawn; infill = area / (0.565 x 0.215) + 5%. Floor supplier to confirm.

SLEEPER WALL / STEP WALLS (BY OTHERS)

Mark	Item	Length
S1	Sleeper wall under the lower B&B	6,203
A1	140 blockwork, zone step	3,649
A2	140 blockwork, zone step	6,256
A3	140 blockwork, zone step	3,035

NOTES

1. LOWER ZONE (kitchen / dining / snug) FFL 124.400 (0): 82 screed on 150 rigid insulation on 150 precast block and beam (top -232, soffit -382); B&B 67.35 m2 incl. bearings, finished floor 63.21 m2. Bears on the 8in Standard ICF footing course; S1 sleeper wall as intermediate bearing.
2. UPPER ZONE (all other rooms) FFL 125.000 (+600): 75 screed on 150 rigid insulation on 150 precast block and beam (top +375.4, soffit +225.4); B&B 158.63 m2 incl. bearings, finished floor 149.10 m2. Bears on the first 6in XR35 course with a 150 mm CUT TO THE INSIDE FACE (bearing ledge on the concrete core) - allowed for in the pre-cut service.
3. ZONE STEP 600 between the zones along the 140 blockwork partitions A1 / A2 / A3 (by others): support of the upper B&B ends at the step, DPM / insulation continuity to the floor supplier and engineer.
4. S1 SLEEPER WALL (y 4,802, x 355..6,558) under the lower zone B&B - blockwork on its own footing, BY OTHERS (indicative, engineer / groundworker to confirm).
5. BEAM LAYOUT INDICATIVE - FLOOR SUPPLIER TO DESIGN: beams drawn spanning the short way of each zone @565 c/c for pricing / coordination only; type, layout, bearings, ventilated void, DPM / radon measures and any intermediate supports to the precast supplier and Building Regulations. Levels mm above the lower FFL.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	First issue - with the Distributor BOM

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Development	Langley Lane Farm, Langley Lane, Middleton M24 5LJ

DRAWING TITLE

GROUND FLOOR STRUCTURE

Block and beam floor zones, indicative beam direction, sleeper wall

SCALE	SIZE	DATE
1:125	A3	02.11.26
DRAWN	**CHECKED**	**APPROVED**
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-063-FL-01	-